



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Q76441
1381

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02360250.1

Der Präsident des Europäischen Patentamts;
Im Auftrag


For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

06/03/03





Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 02360250.1

Anmeldetag:
Date of filing:
Date de dépôt: 30/08/02

Anmelder:
Applicant(s):
Demandeur(s):
ALCATEL
75008 Paris
FRANCE

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:

Optical transceivers for path-protected passive optical metro access rings

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

H04B10/213

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing:
Etats contractants désignés lors du dépôt:

AT/BG/BE/CH/CY/CZ/DE/DK/EE/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/

Bemerkungen:
Remarks:
Remarques:

Optical transceivers for path-protected passive optical metro access rings

5

Technical Field of the Invention

10 The invention relates to a network component for an optical network. More precisely the invention discloses a transceiver for passive metro rings.

Prior Art

15 For network resilience reasons in passive metro rings components are connected through redundant optical lines. At the transmitters the optical information is either switched between two redundant paths (1:1 protection) or split and passed simultaneously into at least two paths e.g. fibers (1+1 protection). An optical fiber switch can be used to switch between two independent optical paths at both ends of the fiber link. Optical fiber switches need a control entity and a power supply. In cases where the
20 switch is located in a passive node a remote control and remote powering is required. In the latter case the optical switch on one end can be avoided and substituted by a fiber coupler to feed both optical paths. The splitting in a symmetrical optical coupler introduces a splitting loss which is higher than necessary and reduces the maximum fiber ring circumference by up to approx. 6km, which is 25% of the passive ring's total
25 circumference. Thus, the state of the art is only a good solution when nothing is known about the fiber paths' attenuation.

Background of the invention

30 One of the key problems is the mitigation of the (fiber-) span limiting effect of the fiber couplers. The power loss results from the path protection applied in passive metro rings using redundant fibers. The corresponding problem caused by the avoidance of

optical switches is the limited power supply of the passive metro nodes, which makes it necessary to reduce the energy consumption.

Summary of the invention

5

It is therefore a target of the present invention to provide a device that reduces the loss of light.

The passive metro rings span is significantly limited through the lack of optical amplification options and also of electrical regeneration in transit nodes. The unique fact,
10 that the attenuation of the working path is the complement of the attenuation of the protection path is not exploited in the prior art. According to the invention asymmetrical optical splitting with a splitting ratio corresponding to the respective path attenuation is used. The splitting device could be an optical fiber coupler.

15

The invention extends the maximum fiber span in path protected passive metro rings by up to 25%, without the need of optical switches. The total costs are reduced because of the simple components.

20

Other objects and advantages of the present invention may be ascertained from a reading of the specification and depended claims in conjunction with the drawings wherein.

Detailed Description

25

The basic idea of this invention consists in applying an optical splitting device in front of the optical transceivers, which has in general an asymmetrical splitting ratio. The splitting is an ideal solution for the special conditions of the upcoming metro ring networks with entirely passive nodes in the metro access level and fiber path protection.

30

The excess attenuation caused by the beam which is split and passed into the two paths can be adapted to the asymmetrical fiber link attenuation of the respective paths the device is connected to. The existence of one master node results in different spans/path attenuation on a passive ring. Different splitting ratios are required, e.g. 1:1, 1:2, 1:5, 1:10, to reduce the overall loss. A variable /configurable splitting ratio

is also useful. The splitter could be integrated in the transceiver and could be set mechanically/electronically to exploit the output power/sensitivity of the E/O and O/E converters.

- 5 Another part of the invention is a network component for an optical network, comprising a transceiver, and an optical splitting device, which is installed in front of the optical transmitter or receiver. The optical splitting device has an asymmetrical splitting ratio, transferring light into or accepting light from different fibers.

- 10 The preferred embodiments of the invention are set forth in the dependent claims.

This component is preferably connected to a path-protected passive-optical metro access ring, wherein the ring segments provide a redundancy. The asymmetrical splitting ratio of the optical splitting device corresponds to the attenuation of the ring segments
15 it is connected to. The attenuation is generally related to the length of the path.

In a preferred embodiment the splitting ratio of said optical splitting device is adjustable, in particular by mechanic or electronic means.

- 20 In another embodiment a multiplexer is used to connect a plurality of customer sites to one network node hosting one or more optical splitting devices having the same splitting ratio.

The multiplexer can be located at different positions. It can be directly integrated into the network node. In an alternative embodiment the multiplexer is located close to a
25 group of clients or stations.

The multiplexer can also be positioned in front of the optical splitter module or behind the module.

It is obvious to those skilled in the art that the multiplexer can also be located at other positions.

30

The optical splitting device is a fiber device (e.g. fused fiber coupler), a bulk optic device (e.g. lens coupled mirror) or an integrated optic device including also micro-mechanic embodiments which can be adjusted. In a preferred embodiment it is self-

adjusting. The adjustment can be driven by the master node, that transmits information about the difference of the detected light intensity of both segments to the passive node. After receiving the message the passive node can adjust the ratio.

- 5 Another part of the invention is a network comprising the network module described above and a method of driving a passive optical ring network.

Although no multiple referenced claims are drawn, all reasonable combinations of the features in the claims shall be disclosed.

10

Description of the drawings

For a more complete understanding of the present invention, reference is established to the following description made in connection with accompanying drawings in

15 which:

Fig. 1 shows a network consisting of a plurality of passive nodes connecting stations, communicating with a master node;

- 20 Fig. 2 shows a network consisting of a plurality of passive nodes, connecting stations communicating with a master node, wherein a passive-node-located multiplexer connects a plurality of stations with the network;

- 25 Fig. 3 shows an alternative embodiment of the network shown in Fig. 2 providing a different protection scheme.

Passive metro-access rings providing high bandwidth at moderate cost gain importance to bridge (e.g. with giga bit Ethernet technology) the metro gap. However, path restoration is a must for carrier-class networks. The attenuation caused by the components, serving two independent optical paths, cuts the maximum bridgeable distance and the possible coverage of the metro network. Since the transceivers have only moderate output power (eye safety) the available power budget is rather limited.

30 Measures are necessary to exploit the maximum resources. The closer a station is to

the master node the longer is the redundant link, e.g. located at the One o'clock position on the passive ring, the signal has to pass the entire circumference on the 'long path'. *The path attenuation follows the fiber length.*

- 5 In all figures the nodes communicate ptp (Point to Point) with the master node along two diverse paths, which are assumed to be passive and do not provide multiplexing or a regeneration functionality. Except the node located at the 6 o'clock position communicates over two paths with equal length and attenuation.
- 10 All figures show only a single transmission direction, in this case 'upstream', that means from the customer towards the master node. The corresponding reverse direction has an equivalent topology e.g. with an asymmetrical split in front of the receiver or a common splitter for single fiber transceivers. Figure 1 shows a principal configuration with a network comprising passive nodes and stations 1 and 6 including a
- 15 transceiver and a splitting device . The optical splitting device of station 1 has an *asymmetrical splitting ratio, transferring light into different fibers and accepting light* from different fibers, wherein the splitting ratio of station 6 is symmetric. The splitter, , can be a fiber coupler and can be collocated with the transceiver or can be located in the passive node
- 20 Figures 2 and 3 show wavelength multiplexing in the passive nodes (Np). The stations 5 to 8 comprise a plurality of transceivers coupled to wavelength multiplexers. All customer transceivers in the stations communicate with the corresponding transceiver in the master node. Wavelength division multiplexing (WDM) enables the simultaneous
- 25 communication of all transceiver pairs. Figure 2 shows an individually protected fiber ring circuitry, allowing a random use of the wavelengths not allocated for protection. Figure 3 shows the corresponding circuitry with reduced flexibility, where the protection is bundled for all stations of a distinct node for the advantage of simplified demulti-
- 30 plexing in the master node.

1. The first part of the document is a header section containing the title "THE EFFECTS OF THE 1997 ASIAN FINANCIAL CRISIS ON THE ECONOMIC GROWTH OF THE ASEAN-4 COUNTRIES" and the author's name "Dr. [Name]".

Claims

1. A network component for an optical network, comprising
 - 5 - an optical transmitter or receiver, in particular an optical transceiver,
 - an optical splitting device, which is connected directly or indirectly to the optical transmitter or receiver, wherein the optical splitting device has an asymmetrical splitting ratio, transferring light into different fibers or accepting light from different fibers.
- 10 2. The network component according to claim 1, wherein said optical transceiver is connected to a path-protected passive-optical metro access ring.
3. The network component according to claim 1, wherein said optical transceiver comprises an optical splitting device with an asymmetrical splitting ratio, corresponding to the path attenuation of the ring segments it is connected to.
- 15 4. The network component according to claim 1, wherein the splitting ratio of said optical splitting device is adjustable, in particular by mechanic or electronic means.
- 20 5. The network component according to claim 1, wherein a multiplexer is connected between the optical splitting device and said optical transceiver or wherein a multiplexer is connected behind the optical splitting device and said optical transceiver.
- 25 6. The network component according to claim 1, wherein the optical splitting device is an all-fiber device (e.g. fused fiber coupler), a bulk optic device (e.g. a lens-coupled mirror), an integrated optic arrangement or a micromechanical setup (MEMS)
7. A passive optical ring network, wherein the network comprises a network node
- 30 comprising a component according to claim 1.

8. The passive optical ring network according to claim 7, wherein the network comprises at least one optical transceiver having an asymmetrical optical splitting device being connected to asymmetrical ring segments, wherein the optical asymmetrical splitting ratio corresponds to the attenuation ratio of the ring segments.

5

9. The passive optical ring network according to claim 7, wherein the network comprises optical transceiver with an optical splitting device having an asymmetrical splitting ratio, which is adapted to path attenuation of the optical transceiver in the access ring.

10

10. The passive optical ring network according to claim 7, wherein a multiplexer connects a plurality of customer stations to the network.

15

11. A method of driving a passive optical ring network, wherein a node comprising an optical transmitter or receiver, in particular a transceiver, being connected to asymmetrical ring segments, splits the light corresponding to the attenuation ratio of the ring segments.

20

12. The method according to claim 11, wherein the splitting ratio is self-adjusting.

Optical transceivers for path-protected passive optical metro access rings

Summary

For the special conditions of optical metro ring networks with entirely passive nodes, the invention proposes an optical splitting device in front of the optical transceivers, which has an asymmetrical splitting ratio. The excess attenuation caused by the beam splitting for the two paths can be adapted to the asymmetrical fiber link attenuation of the respective paths the device is connected to.

[illegible]

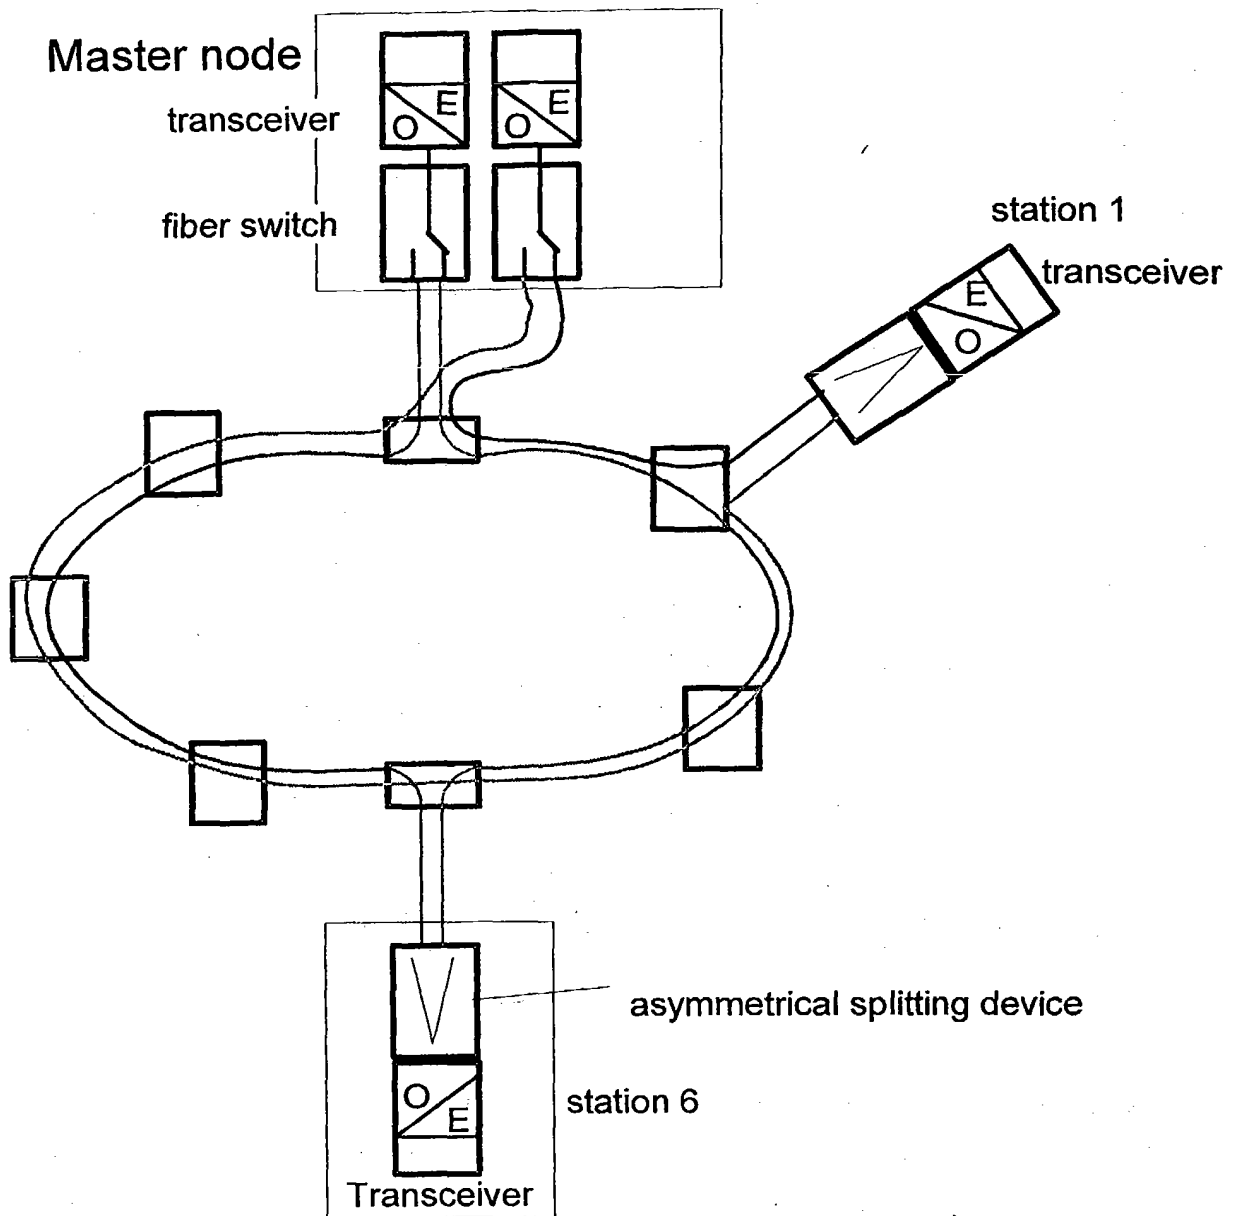


Fig. 1

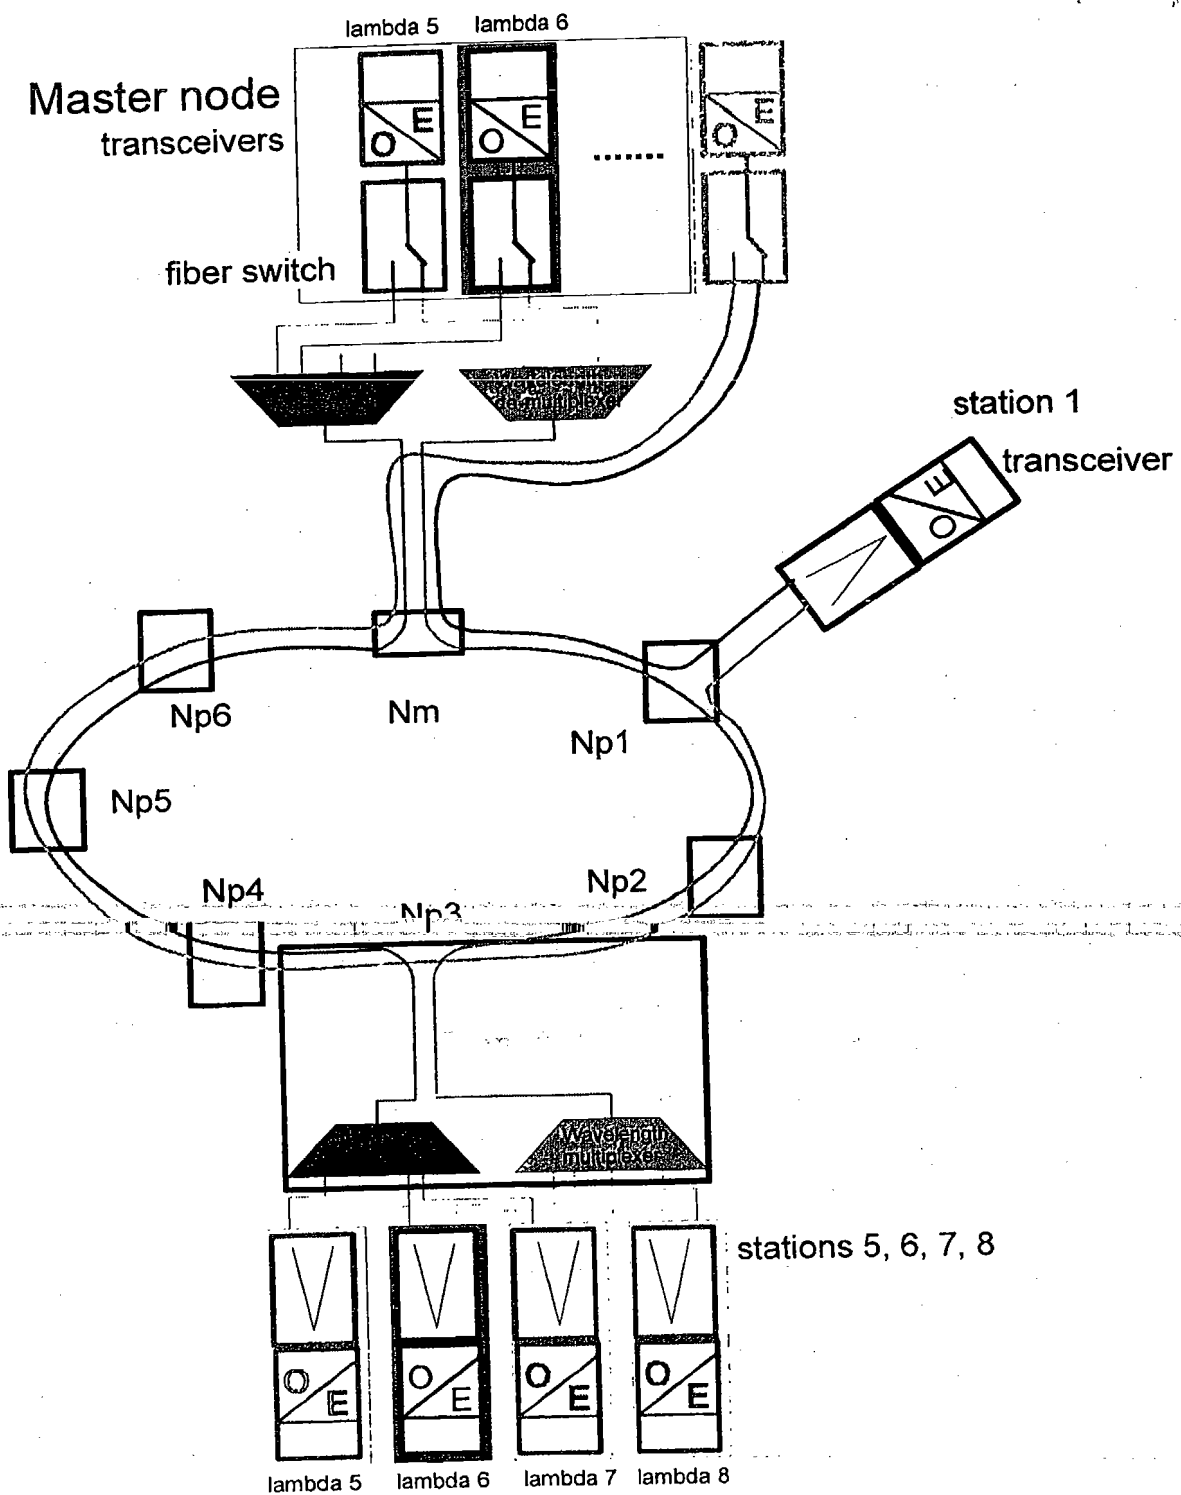


Fig. 2

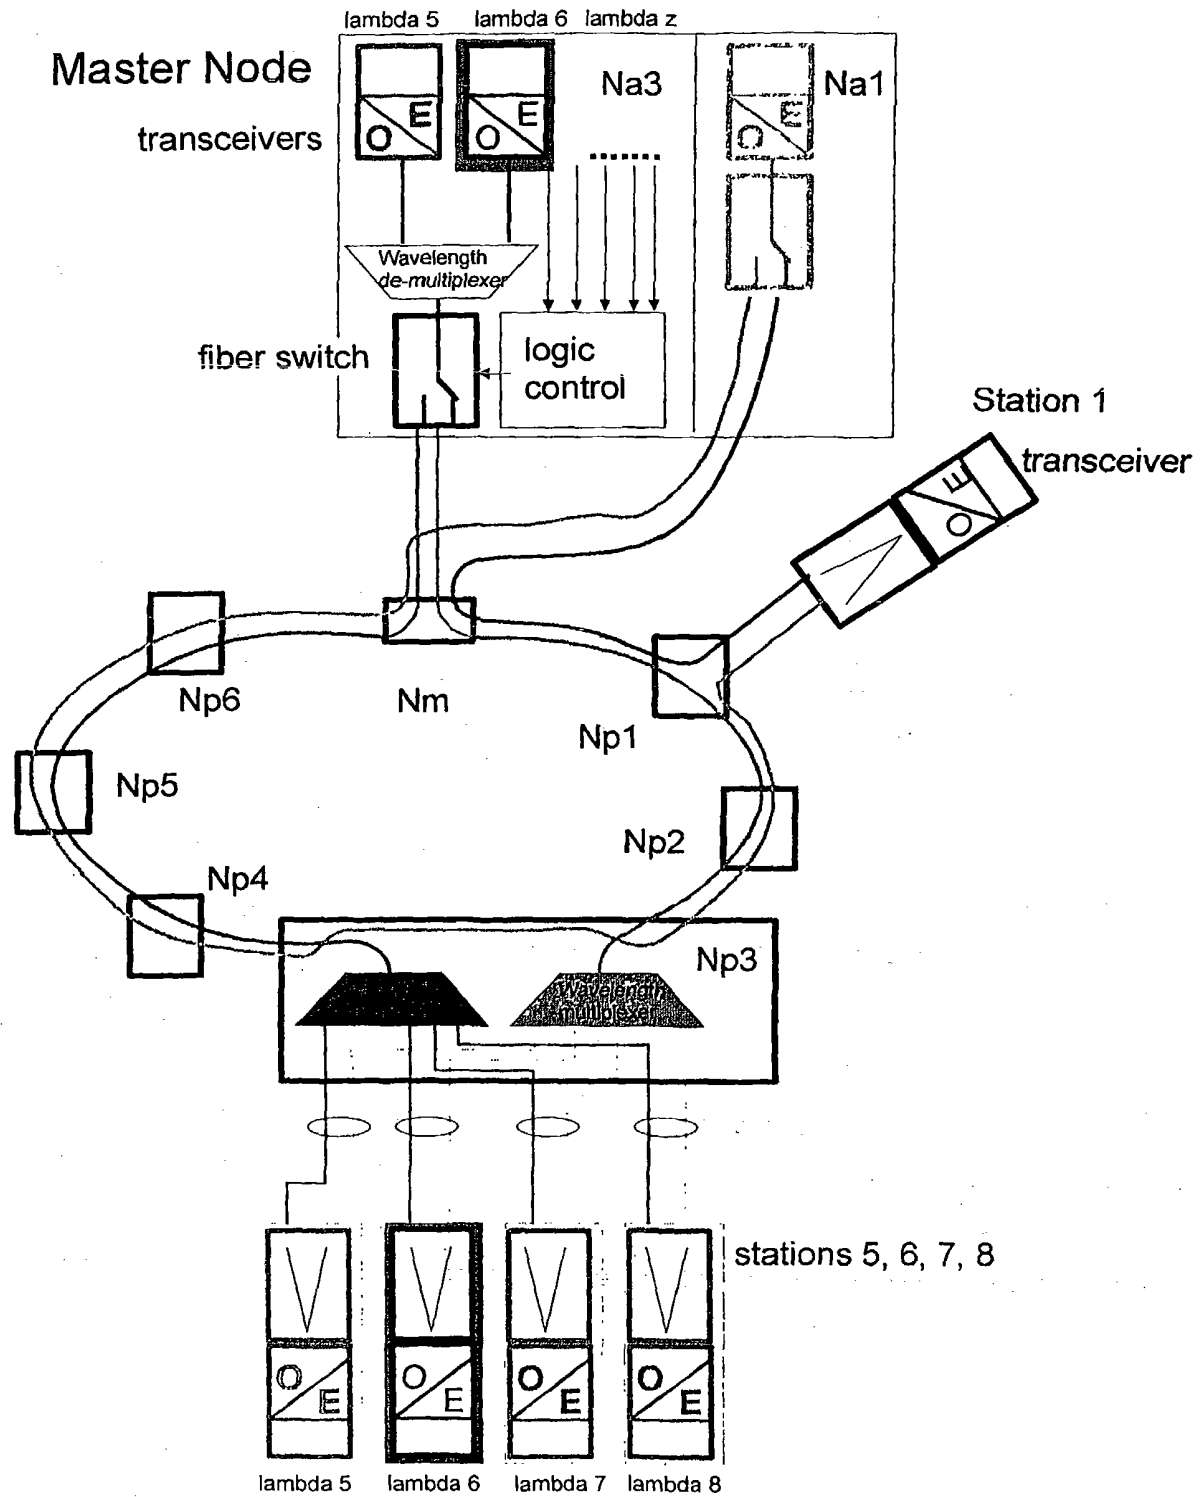


Fig. 3

